


E1W Double Compression Cable Gland



MM-E1W50L B2 (M50)

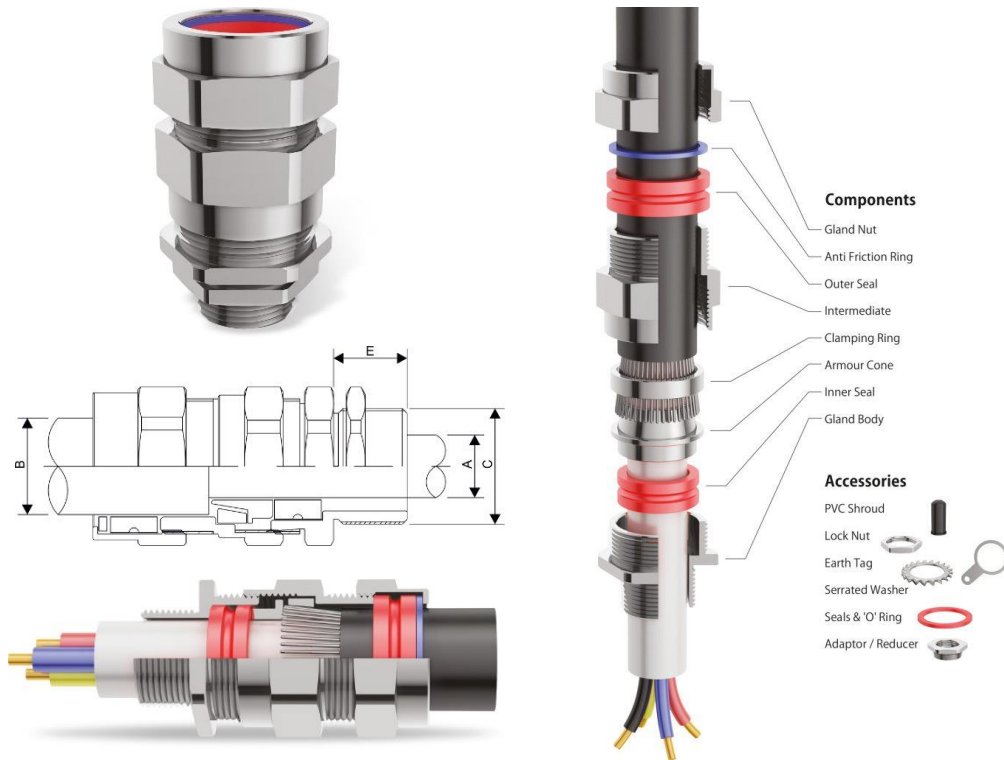

Double Compression Cable Gland For Armoured Cables

CABLE GLAND SIZE DETAILS

Type E1W Double Compression Cable Gland

CODE MM-E1W50L B2 (M50)

Cable Types Armoured (Steel wire armour (SWA) Aluminium wire armour (AWA))

CABLE GLAND SIZE 50L

Application For use with all types of SWA cable for Indoor and outdoor application. Used in applications where it is essential to provide an IP66 seal on the outer sheath. Armour lock with separate armour locking ring, ideal for checking electrical continuity

Metric M50x1.5

Thread Length "E" 15

Standard BS6121: Part 1: 2005. EN50262

Cable Diameter "A"

Option thread Metric

MIN 38

Gland Material Brass (CuZn39PB3)

MAX 44.50

IP Rating	IP66		
Sealing Method	Double Compression Sealing (Sealing on both Outer and Inner Sheath)	Cable Diameter "B"	
Operating Temperature	Standard Seals (Nitrile): -20°C TO 80°C. On Request (Silicone): -50°C To +160°C	MIN	45.80
Finish	Natural Brass or Nickel Plated or Electroless Nickel Plated	MAX	52.80
Accessories	PVC Shroud, SLSF Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer.	Across Flat	65.50
		Across Corner	73

* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)

* All the dimensions given are in Millimeters (mm)

* Can be also provided in Kit Packing as per requirement