


A2F Type Single Compression Cable Gland

MM-EX-A2F-20 1N B2 (1/2" NPT)

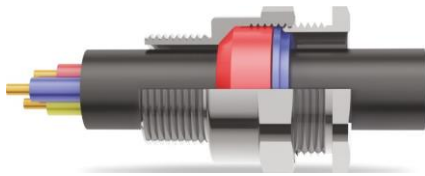

CABLE GLAND SIZE DETAILS

Type A2F Type Single Compression Cable Gland
Cable Types Unarmoured
Application For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured

1/2"

Option thread NPT
Gland Material Brass Nickle Plate (BNP)
IP Rating IP66 & IP68

Gas Group II C
EPL (Equipment Protection Level) Zone 1, Zone 2 Gb, Gc, Gas
 Zone 21, Zone 22, Db, Dc Dust

Sealing Ring Single Compression Sealing
Operating Temperature Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C
 EAC-60°C ≤ Ta ≤ +130°C

Finish Natural Brass or Nickel Plated

Accessories PVC Shroud, Lock Nut, Earth Tag, Serrated Washer,

CODE MM-EX-A2F-20 1N B2 (1/2" NPT)

CABLE GALND SIZE 20

ENTRT THREAD "C"
 NPT

THREAD LEGTH "E"
 NPT 20

CABLE DIAMETER "A"
MIN 8.0
MAX 13.9

HEX SIZE
M : MAX 27
N : MAX 30

Adaptor / Reducer

IECEx Certificate No. ECEX PRE 20.0124X
ATEX Certificate No. Presafe 20 ATEX 48906X
EAC Certificate No. RU C-IN.AA71.B.00212/20
PESO Certificate No. P538496/4
Protection Type Ex d, Ex e, Ex t

- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- * All the dimensions given are in Millimeters (mm)
- * Can be also provided in Kit Packing as per requirement