


A2F Type Single Compression Cable Gland

MM-EX-A2F-50S 5N B2 (1.1/2" NPT)

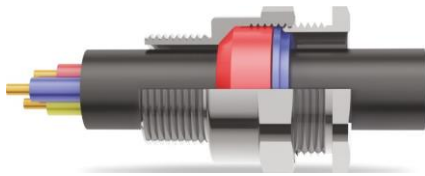

CABLE GLAND SIZE DETAILS

Type	A2F Type Single Compression Cable Gland	CODE	MM-EX-A2F-50S 5N B2 (1.1/2" NPT)
Cable Types	Unarmoured	CABLE GALND SIZE	50S
Application	For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured plastic or rubber sheathed cables.	ENTRT THREAD "C"	
Option thread	NPT	NPT	1 1/2"
Gland Material	Brass Nickle Plate (BNP)	THREAD LEGTH "E"	
IP Rating	IP66 & IP68	NPT	26
Gas Group	II C	CABLE DIAMETER "A"	
EPL (Equipment Protection Level)	Zone 1, Zone 2 Gb, Gc, Gas Zone 21, Zone 22, Db, Dc Dust	MIN	31.1
Sealing Ring	Single Compression Sealing	MAX	37.5
Operating Temperature	Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C EAC-60°C ≤ Ta ≤ +130°C	HEX SIZE	
Finish	Natural Brass or Nickel Plated	M : MAX	55
Accessories	PVC Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer	N : MAX	60

IECEx Certificate No. ECEX PRE 20.0124X
ATEX Certificate No. Presafe 20 ATEX 48906X
EAC Certificate No. RU C-IN.AA71.B.00212/20
PESO Certificate No. P538496/4
Protection Type Ex d, Ex e, Ex t

- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- * All the dimensions given are in Millimeters (mm)
- * Can be also provided in Kit Packing as per requirement