



IP68 IP66

AXL IP68 / IP66 Aluminium Enclosures

MM AXL B 20 - 360 x 122 x 80

Features of Enclosure

Impact & Shock Resistance	Withstands impacts up to 7 Joules.
Invisible Mounting	Maintains ingress protection through inner mounting holes.
Fire Retardant	Complies with IS 11000 and IEC 60695 standards.

Specifications

Material	Corrosion-resistant Aluminum Alloy ENAC/GdAlSi12 (DIN 1706).
Corrosion Resistance	>1000 hours of salt spray resistance, certified to ASTM B117 and IS 9000.
Ingress Protection	IP68, IP66 Certified to IS/EN 60529.
Screws	Stainless Steel SS304/A2.
Gasket	One-piece compression-moulded, available in Silicon, Neoprene, or EMI-RFI.
Earth Screws	Steel with copper coating and integral spring washer.

Applications


Industrial	Electrical systems in factories and processing plants.
Hazardous Areas	Safe use in explosive or volatile environments.
Electric Vehicles	Protection for electrical components in EVs.
Infrastructure	Enclosures for telecoms, transport, and utilities.
Marine & Offshore	Durable protection in marine and offshore settings.
Outdoor	Reliable shielding against harsh weather conditions.

Enclosures Range/Sizes

General Part Number	Natural Finish Uncoated	MM AXL B 20-0000
MM AXL B 20	Ral 7001 Silver Grey	MM AXL B 20-7001
Dimensions/ Size	Ral 9005 Black	MM AXL B 20-9005
360 x 122 x 80		



Features & Specifications

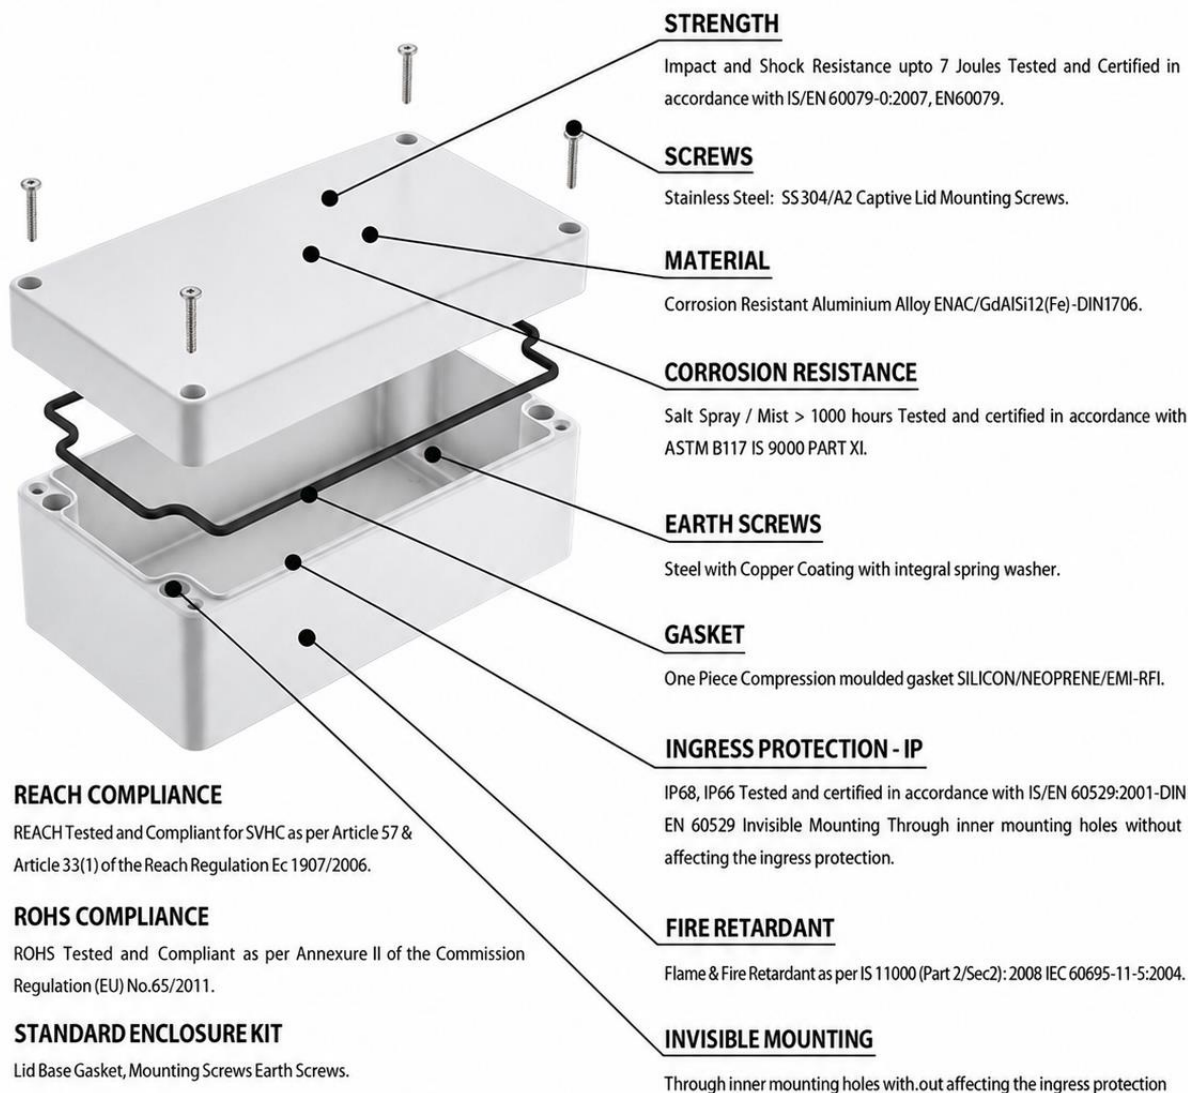

REACH COMPLIANCE

REACH Tested and Compliant for SVHC as per Article 57 & Article 33(1) of the Reach Regulation Ec 1907/2006.

ROHS COMPLIANCE

ROHS Tested and Compliant as per Annexure II of the Commission Regulation (EU) No.65/2011.

STANDARD ENCLOSURE KIT

Lid Base Gasket, Mounting Screws Earth Screws.

SCREW OPTIONS

Pan Combi Head, Torx Head, Allen Head, Cheese Head.

GASKET OPTIONS

NEOPRENE -40°C to +130°C

SILICON -60°C to +200°C

EMI/Rfi Conductive Gasket on request

STANDARD COLOURS



NATURAL
ALUMINIUM



RAL 7001
SILVER GRAY





RAL 9005
BLACK




IP68 IP66

MM AXL B 18

SIZE - 360 x 122 x 80 mm

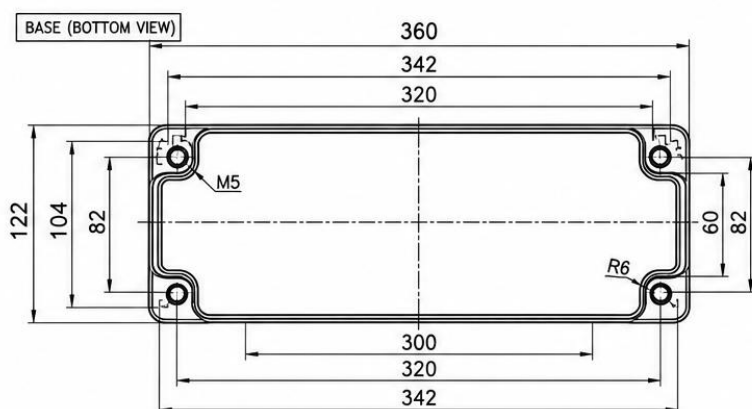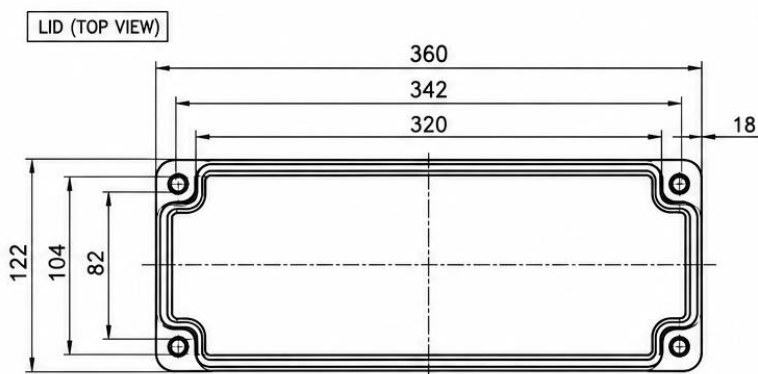

- NOTE:**
1. All dimensions are in millimeters.
 2. General Tolerance: ± 0.3 mm
 3. Material: ABS / Polycarbonate
 4. Colour: Light Grey

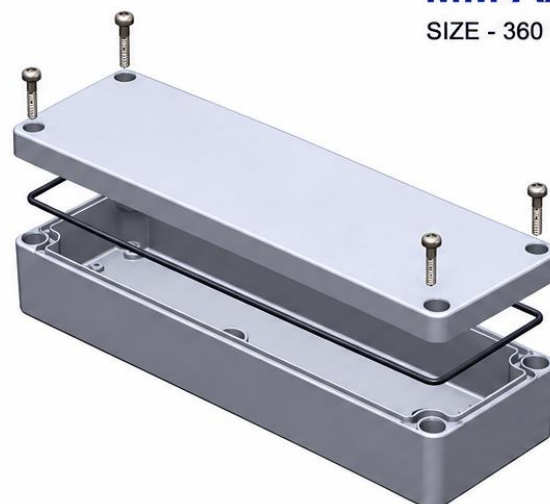

Cylinder screw
M5x20 (4nos.)
similar to DIN 84

