



# Plug

## NPT Thread

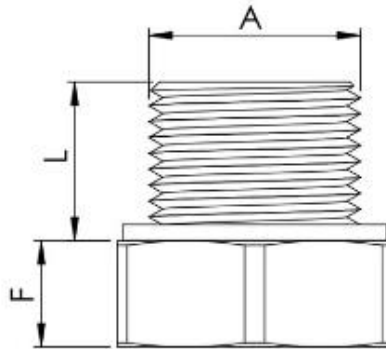

### MM-BRD-0 X6

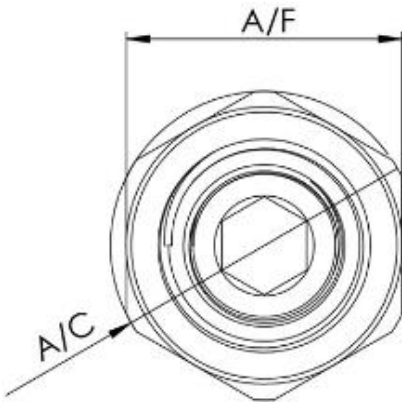

#### Breather Plug Ex d

|                                  |                                                             |
|----------------------------------|-------------------------------------------------------------|
| IP Rating                        | IP66                                                        |
| Certificate No.                  | IECEX, ATEX & EAC                                           |
| ATEX Certificate No.             | DNV 25 ATEX 18020U                                          |
| IECEX Certificate No.            | IECEX DNV 25.0139U                                          |
| EAC Certificate No.              | Certification in Progress                                   |
| PESO Certificate No.             | Certification in Progress                                   |
| Thread Type                      | NPT                                                         |
| Protection Type                  | Ex e, Ex t                                                  |
| Material                         | Stainless Steel (SS304/SS316L)                              |
| Ambient Temperature (IECEX/ATEX) | -55°C to +160°C                                             |
| Ambient Temperature (EAC)        | -60°C to +130°C                                             |
| Gas Group                        | IIA, IIB                                                    |
| EPL (Equipment Protection Level) | Zone 1, Zone 2 Gb, Gc, Gas<br>Zone 21, Zone 22, Db, Dc Dust |

#### NPT Thread

|                     |             |
|---------------------|-------------|
| CODE                | MM-BRD-0 X6 |
| Thread (A)          | 3/8"        |
| Thread Length L     | 15          |
| Protrusion Length F | 10          |
| Hexagon A/F         | 20          |
| Hexagon A/C         | 22          |

**Accessories** Teflon Washer, Castellated Locknut

**Material Codes** B1 – Brass Natural Finish; B2 – Brass Nickel Plated; B3 – Electroless Nickel Plated; X4 – SS304; X6 – SS316L